




# TSTAR Sample Configuration

## TSTAR v1.7 Instantiation

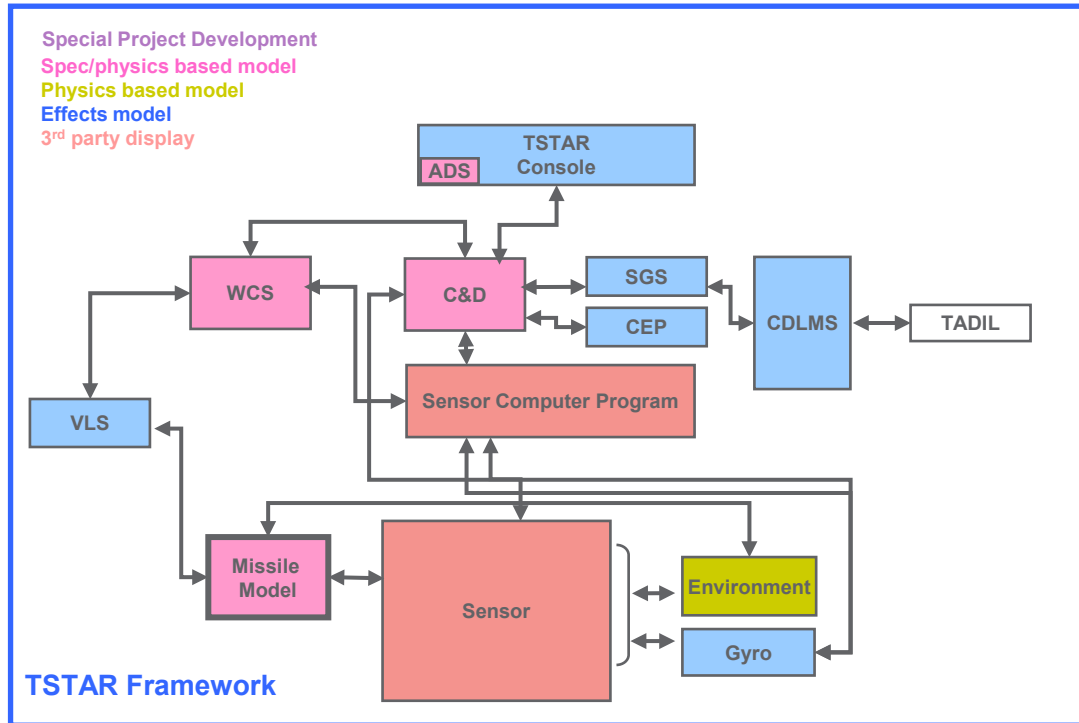

Sub-set configurations available to suit customer needs

- Interfaces to Sensor and Sensor Computer Program can match a specific Tactical SPY baseline (eg: Baseline 9 Build 28 Equivalent)
- Missile Model can accept uplink/downlink messages from Sensor
- C&D model can accept tactical CEP equivalent messages
- Additional Customer tactical components and/or representative models can be integrated into TSTAR